


# LED LINEAR DOWNLIGHT



# LED LINEAR DOWNLIGHT

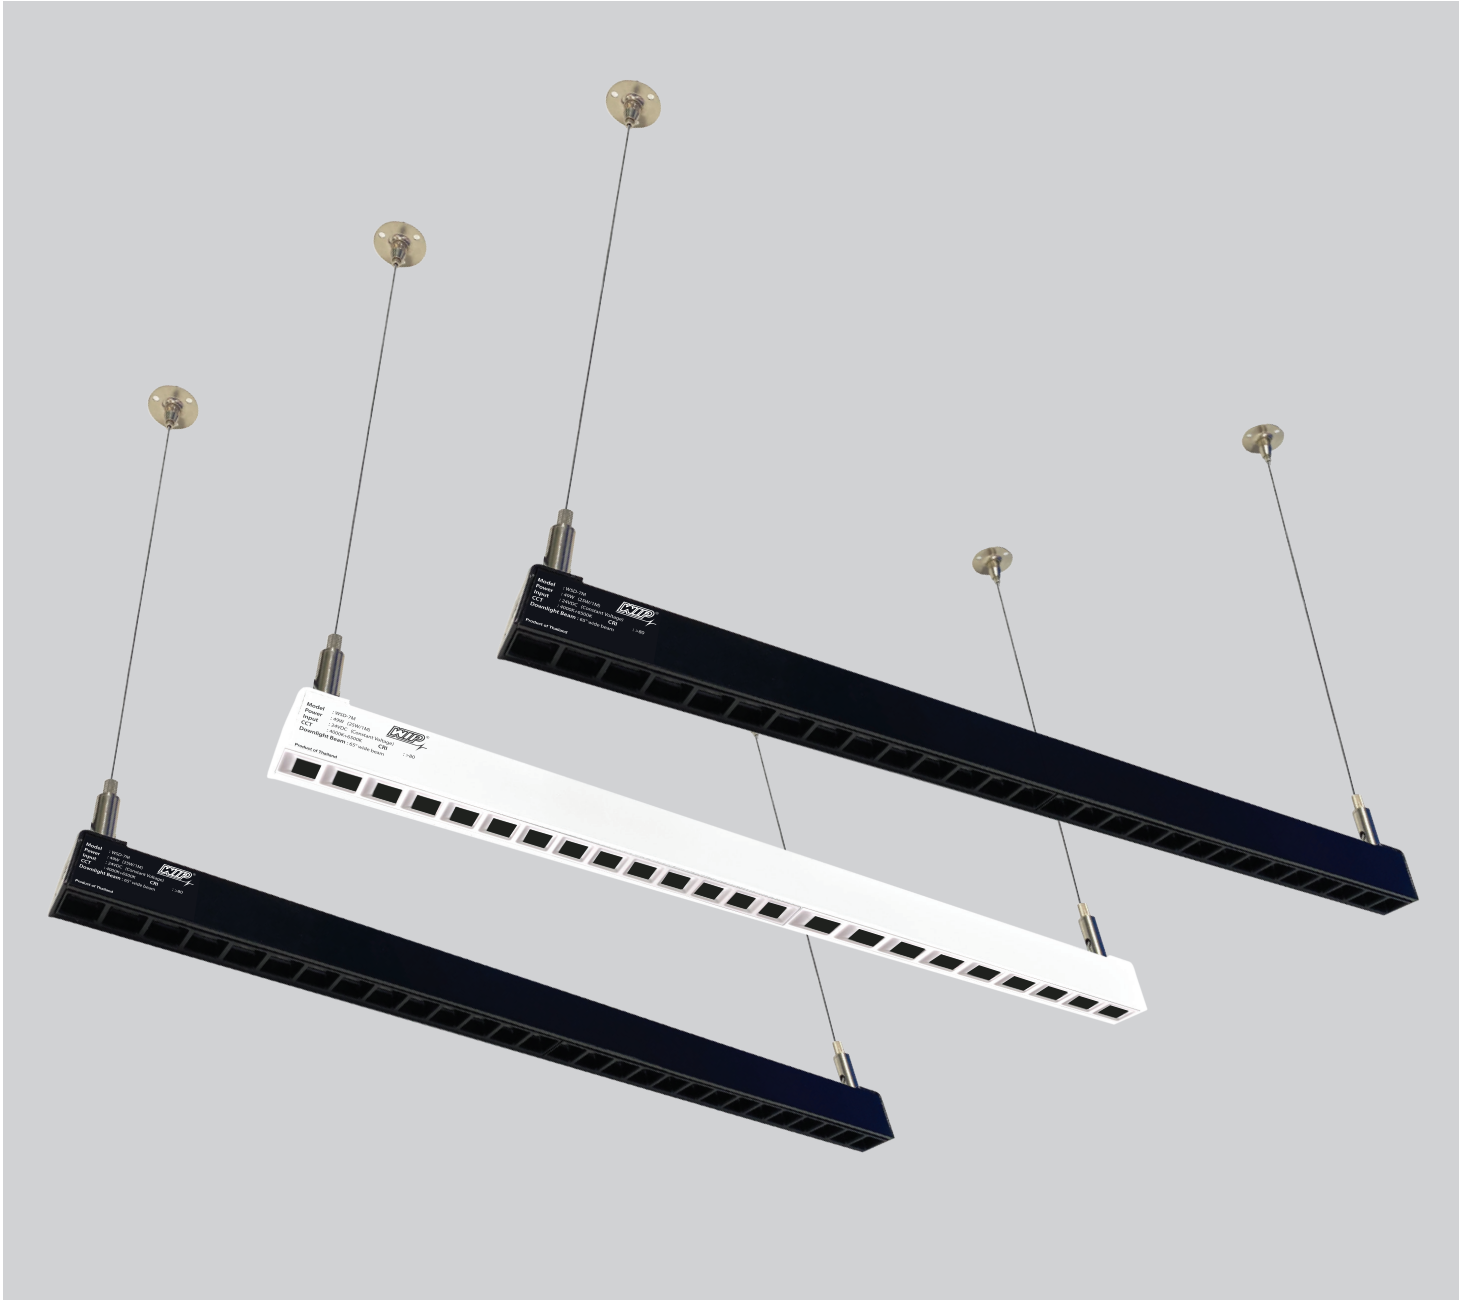

*Signature*  
Designed by WIP

## LED Linear Downlight : Daisy-Mini Series

### Specification

The aluminum extrusion of light shell, modern design, low power consumption and energy saving. The design has convenient installation, operation and maintenance also provided long life time usage. This is the perfect solution for premium class indoor lighting with seamless glare eliminating shade, accurate beam control or diffused lenses for smooth lighting and excellent color mixing. LED linear downlight different lighting levels are used to create a balanced effect throughout the space, contrast, mood and drama. Idea for department store, household, fashion, modern office, conference room, over kitchen counters, etc.


<b>Input Voltage</b>	24 VDC (Constant Voltage)	<b>LED Light Source</b>	Everlight	<b>Finishing</b>	- Anodize in black matt - White matt
<b>Work Temperature</b>	-10°C to + 65°C	<b>CRI</b>	>80	<b>Tube</b>	Aluminium Extrude
<b>Beam Angle Down</b>	30° wide beam , 55° wide beam, 65° wide beam	<b>CCT</b>	2700K (Warm White) 3000K (Warm White) 4000K (Cool White) 5000K (Cool Daylight)	<b>Shade</b>	- black matt - white matt
<b>LED Life Time</b>	50,000 hrs.	<b>Glare Control</b>	Tunable White UGR <19	<b>Mount</b>	Suspension Cable
<b>Lens Material</b>	Polymethyl methacrylate (PMMA)	<b>Driver</b>	External Driver	<b>Warranty</b>	1 Year

Model	Power (W)	Luminous Flux (lm)	Efficiency (lm/W)	Weight (Kg.)	Dimension (mm.)
WSD-1M	7	700	100	0.583	29x285x31.5
WSD-2M	14	1,400	100	0.800	29x565x31.5
WSD-3M	21	2,100	100	1.017	29x845x31.5
WSD-4M	28	2,800	100	1.234	29x1125x31.5
WSD-5M	35	3,500	100	1.451	29x1406x31.5
WSD-6M	42	4,200	100	1.668	29x1687x31.5
WSD-7M	49	4,900	100	1.885	29x1967x31.5
WSD-8M	56	5,600	100	2.102	29x2247x31.5
WSD-9M	63	6,300	100	2.319	29x2527x31.5
WSD-10M	70	7,000	100	2.536	29x2807x31.5


# LED LINEAR DOWNLIGHT

## LENS


### Downlight Lens

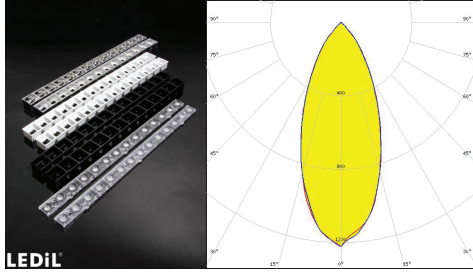

~30° wide beam

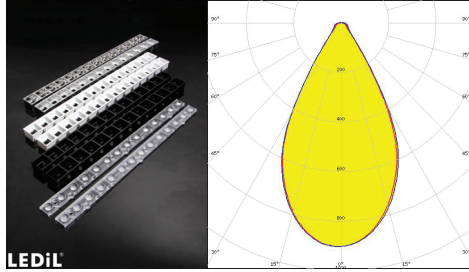

~55° wide beam

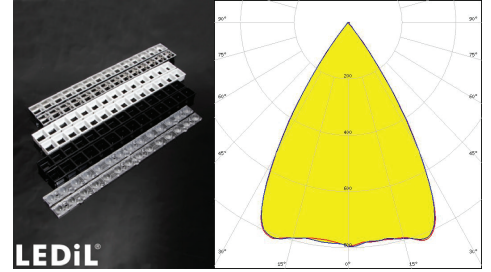


~65° wide beam

## Shade





black matt

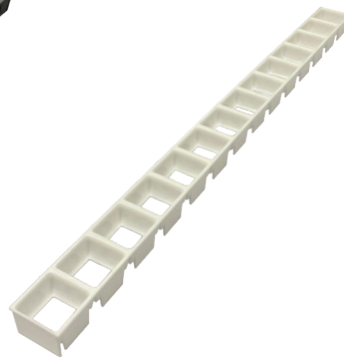



white matt

## Accessories


Connector 90

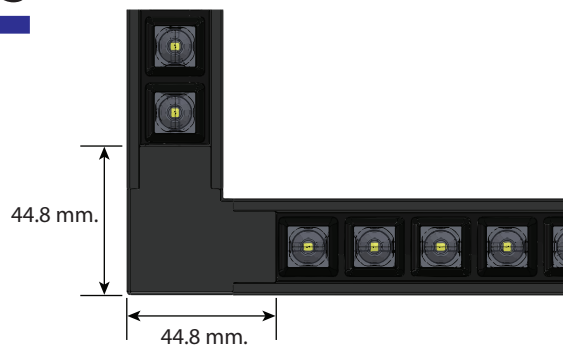

Connector 180

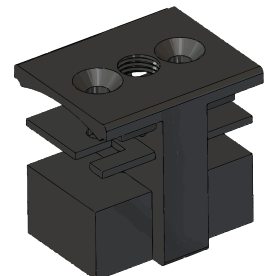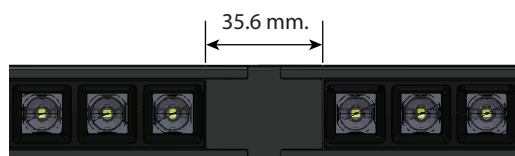

# LED LINEAR DOWNLIGHT

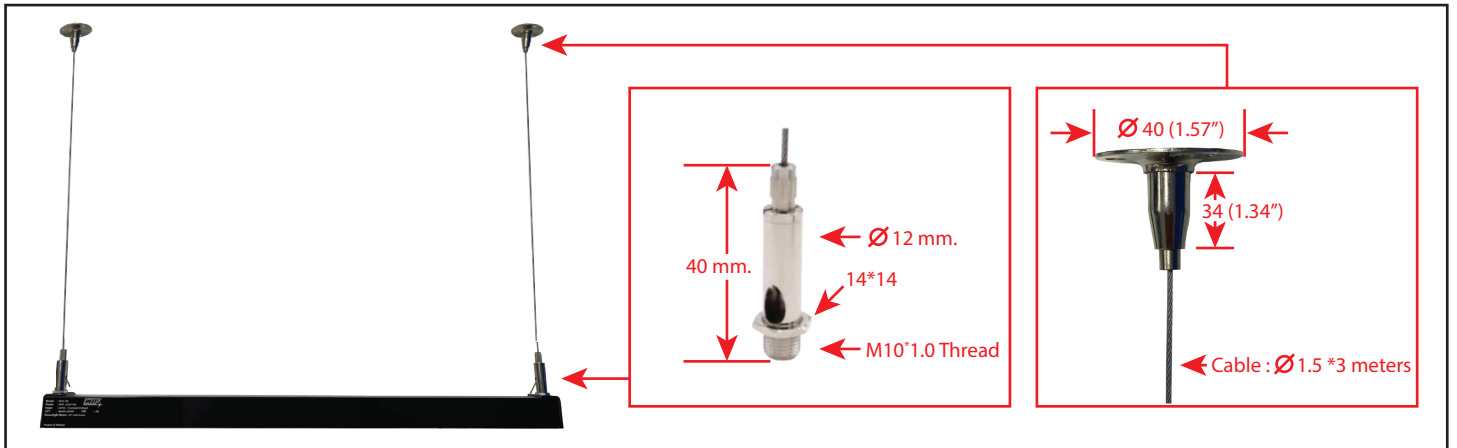

## Dimension



Model	Dimension (mm.)		
	(W)	(L)	(H)
WSD-1M	29	285	31.5
WSD-2M	29	565	31.5
WSD-3M	29	845	31.5
WSD-4M	29	1125	31.5
WSD-5M	29	1406	31.5
WSD-6M	29	1687	31.5
WSD-7M	29	1967	31.5
WSD-8M	29	2247	31.5
WSD-9M	29	2527	31.5
WSD-10M	29	2807	31.5