



W-TS222

Time Switch, 24 Hour




TIS 2432-2555

คุณสมบัติ

W-TS222 เป็น Digital Timer Switch 24 ชั่วโมง สำหรับควบคุมการเปิด-ปิด อุปกรณ์ไฟฟ้าในระยะเวลา 24 ชั่วโมง สามารถตั้งโปรแกรมได้สูงสุด 5 ช่วงเวลา (5 ON/OFF ต่อวัน) เหมาะสำหรับการควบคุม ระบบไฟส่องสว่าง, ปั๊มน้ำ, พัดลม, อุปกรณ์ไฟฟ้าอื่นๆ

- หน้าจอแสดงผล 7-Segment
- ระบบนาฬิกา Real Time Clock พร้อมแบตเตอรี่สำรอง (Backup Battery) อายุการใช้งาน 3-4 ปี
- สามารถตั้งโปรแกรมเปิด-ปิดได้สูงสุด 5 โปรแกรมต่อวัน
- รองรับโหลดสูงสุด 16A/250VAC (Max. 3500W)
- Surge Protection ป้องกันไฟกระชาก 2KV
- ผ่านการรับรองมาตรฐานผลิตภัณฑ์อุตสาหกรรม มอก.2432-2555

หน้าปัดการทำงาน

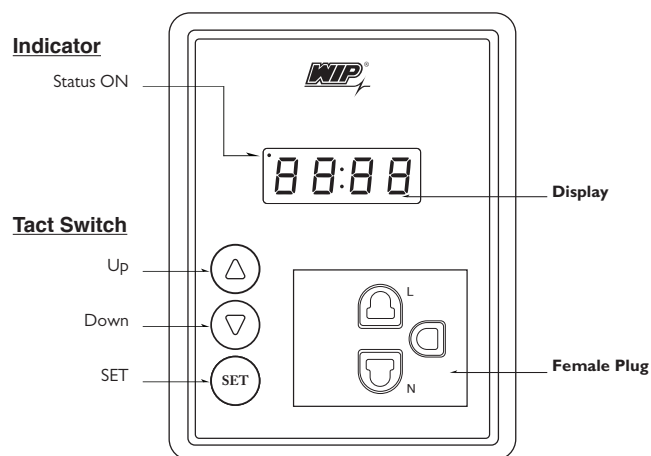

Specification


ข้อมูลจำเพาะ

Model	: W-TS222	AC Input Power Plug	: Cable 60277 IEC 53 300/500V PVC/PVC 70 °C 3x1.5 SQ.mm. TIS.11 Part 5-2553, TIS.166-2549
Code	: 48056	Environmental	
Feature		Operating temperature	: 0 °C to +55 °C
Power consumption	: <2 VA	Storage temperature	: -10 °C to +70 °C
Input voltage	: 220 VAC	Ambient humidity	: Max 85%RH
Operating voltage	: 100 - 265 VAC	Enclosure	
System frequency	: 50/60 Hz.	Output type	: Female plug 16A 250VAC TIS. 166-2549
Surge protection	: 2 KV	Domension in mm	: 93 x 120 x 44
Display	: 7-segment Red LED, Real Time Clock	IP Rating	: IP20
Time range	: 24 Hrs.	Weight	: 370 g
Minimum switching time	: 1 Min.		
Number of output channels	: 1 Channel, 16A/250VAC (Max.3500W)		
Battery Backup	: Lithium battery 3VDC/CR 2032 (Backup time 3-4 years)		
Memory location	: 5 (ON/OFF)		
Suitable Applications	: Lighting, Motor pump, Fan, General electrical appliances		
Relay output			
Output Type	: 1-pole change over (SPST)		
Contact rating	: 16A at 250 VAC		
Operations	: Mechanical : 2 x 10 ⁷ times Electrical : 1 x 10 ⁵ times		
Relay reset	: Automatic		




The product should not be dispose of a household refuse.

Timer setting

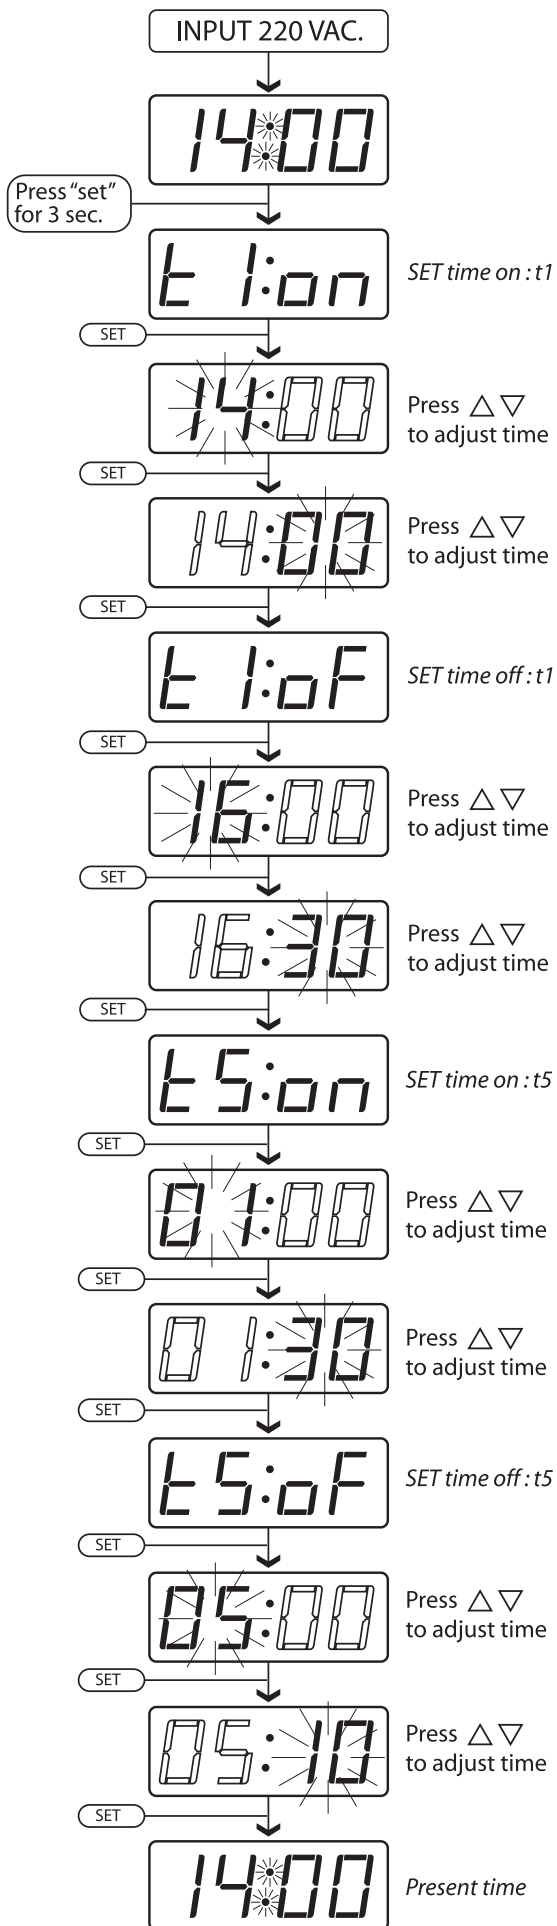

Clock setting

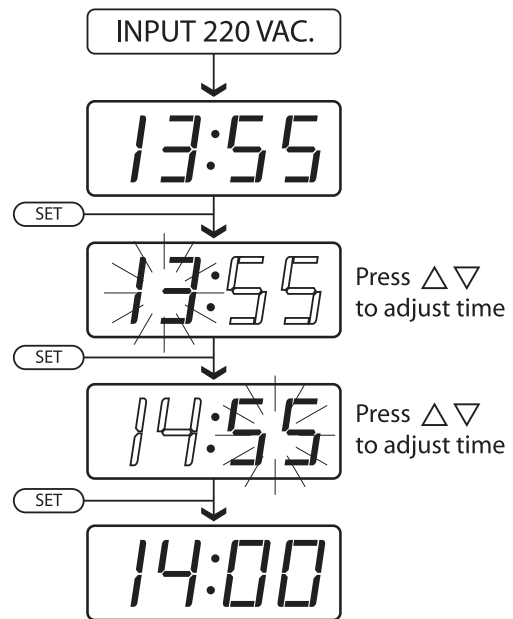

ขนาด (Dimension mm.)

